



Preconsolidation Pressure and Creep Settlements

estimations based on results of oedometer tests

Thorsen, Grete

Publication date:
1995

Document Version
Publisher's PDF, also known as Version of record

[Link to publication from Aalborg University](#)

Citation for published version (APA):

Thorsen, G. (1995). *Preconsolidation Pressure and Creep Settlements: estimations based on results of oedometer tests*. Geotechnical Engineering Group. AAU Geotechnical Engineering Papers: Soil Mechanics Paper Vol. R 9503 No. 1

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- ? Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- ? You may not further distribute the material or use it for any profit-making activity or commercial gain
- ? You may freely distribute the URL identifying the publication in the public portal ?

Take down policy

If you believe that this document breaches copyright please contact us at vbn@aub.aau.dk providing details, and we will remove access to the work immediately and investigate your claim.

Preconsolidation Pressure and Creep Settlements: Estimations based on results of oedometer tests

G. Thorsen

May 1995

Soil Mechanics Paper No 1



**GEOTECHNICAL ENGINEERING GROUP
AALBORG UNIVERSITY DENMARK**

Thorsen, G. (1995). Preconsolidation Pressure and Creep Settlements: Estimations based on results of oedometer tests.

AAU Geotechnical Engineering Papers, ISSN 1398-6465 R9503.

Soil Mechanics Paper No 1

The paper has been published in *Proc. Int. Symp. on Compression and Consolidation of Clayey Soils. IS-Hiroshima'95*, Vol. 1, pp 287-292.

© 1995 AAU Geotechnical Engineering Group.

Except for fair copying, no part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means electronic, mechanical, photocopying, recording or otherwise, without the prior written permission of the Geotechnical Engineering Group.

Papers or other contributions in AAU Geotechnical Engineering Papers and the statements made or opinions expressed therein are published on the understanding that the author of the contribution is solely responsible for the opinions expressed in it and that its publication does not necessarily imply that such statements or opinions are or reflect the views of the AAU Geotechnical Engineering Group.

The AAU Geotechnical Engineering Papers - AGEp - are issued for early dissemination and book keeping of research results from the Geotechnical Engineering Group at Aalborg University (Department of Civil Engineering). Moreover, the papers accommodate proliferation and documentation of field and laboratory test series not directly suited for publication in journals or proceedings.

The papers are numbered ISSN 1398-6465 R<two digit year code><two digit consecutive number>. For internal purposes the papers are, further, submitted with coloured covers in the following series:

Series	Colour
Laboratory testing papers	sand
Field testing papers	grey
Manuals & guides	red
Soil Mechanics papers	blue
Foundation Engineering papers	green
Engineering Geology papers	yellow
Environmental Engineering papers	brown

In general the AGEp papers are submitted to journals, conferences or scientific meetings and hence, whenever possible, reference should be given to the final publication (journal, proceeding etc.) and not to the AGEp paper.

PRECONSOLIDATION PRESSURE AND CREEP SETTLEMENTS

Estimations based on results of oedometer tests

Grete Thorsen

Aalborg University, Denmark

ABSTRACT: The paper describes results of geotechnical investigations carried out in order to estimate the state of consolidation in Holocene silt and clay sediments of unusual thickness. The clay and silt sediments are overlain by 30 meters of sand, sedimented within the latest 1000 years.

Results of oedometer tests with undisturbed samples have been analysed by means of different methods to determine the preconsolidation pressure.

An attempt is made to estimate the creep rates on the basis of AMS ^{14}C -datings of the sediments and a model for creep determination proposed by Moust Jacobsen.

1 INTRODUCTION

The top of Denmark is a spit, Skaw Spit (Skagen Odde), formed since the Weichselian Ice Age by marine sediments. The outermost part of the spit emerged during the latest few centuries.

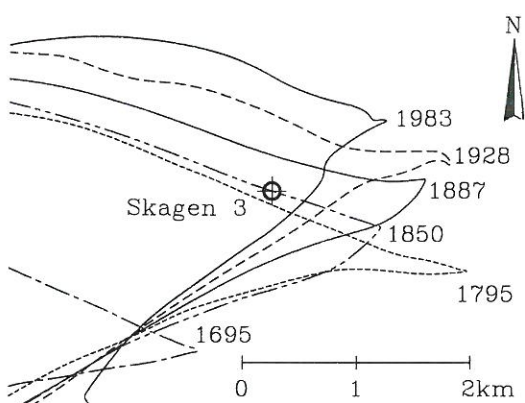


Fig. 1. The changing position of the northernmost coastline of the Skaw Spit (Hauerbach, 1992).

Levellings have indicated, that the youngest part of the spit does not follow the general geostatic uplift of the northern part of Denmark (Hauerbach, 1992).

Further, geological and geophysical investigations have indicated an unusual thickness of relatively young sediments (Knudsen, 1985, Lykke-Andersen, 1987).

In 1992 a boring, Skagen 3, was carried out at the very point of the spit, The Grenen Point. The boring was taken to a depth of 220 m and has shown 114 m of Holocene sediments underlain by sediments from Weichselian, Eemian, Saalian and Lower Cretaceous (Knudsen, 1994).



Fig. 2. The position of Skagen 3 boring.

The material from the boring is being studied as a research project by the GeoKat group at the Department of Earth Sciences, University of Aarhus in cooperation with "The Skagen Spit project -nature and culture", The Geological Survey of Denmark, The University of Quebec in Montreal, The University of Cambridge and Aalborg University.

One of the purposes of the geotechnical investigations presented in this paper has been to estimate the state of consolidation of the Holocene sediments.

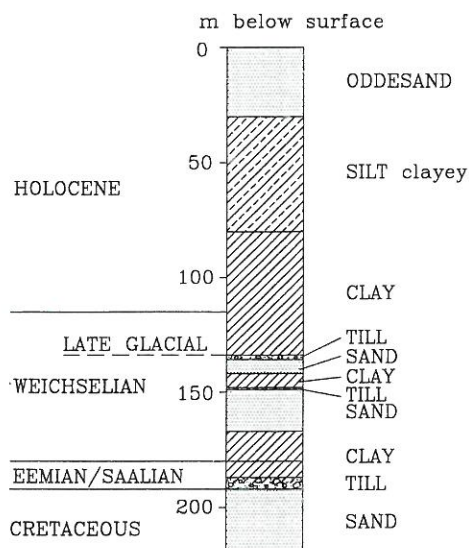


Fig. 3. Skagen 3 boring (Knudsen, 1994).

2. SAMPLING AND IN SITU TESTING

The Skagen 3 boring was, from the depth of 30 m, carried out as a rotary boring with continuous coring. In the Holocene silt and clay layers, undisturbed 70 mm diameter samples were extracted and vane tests carried out at 3 to 6 meters intervals.

In 1993 a boring, Skagen 4, through the upper 30 m "Odde"sand, was carried out as a cable percussion boring with continuous Split Spoon sampling.

In the Holocene clay sediments the undrained shear strength, c_v , measured by the vane represents values of 0.2 to 0.25 times the in situ pressure, σ'_o .

Based on the statistical relation $c_u / \sigma'_o = 0.11 + 0.0037 I_p$, (Skempton, 1957), and the determined values of plasticity index, I_p , (chapt. 3), the results may indicate a clay in a normally consolidated state.

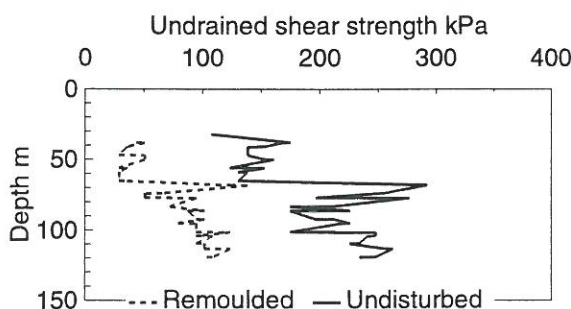


Fig. 4. Skagen 3 boring. Undrained shear strength measured by vane.

3. LABORATORY TESTING

Classification tests and oedometer tests have been carried out with the majority of the undisturbed samples from the Holocene sediments and also with a few samples of the cores from Weichselian and Eemian.

Results of the determination of water content, w , Atterberg limits, w_L and w_p , plasticity index, I_p , and organic content, O.C., are shown in Fig. 5.

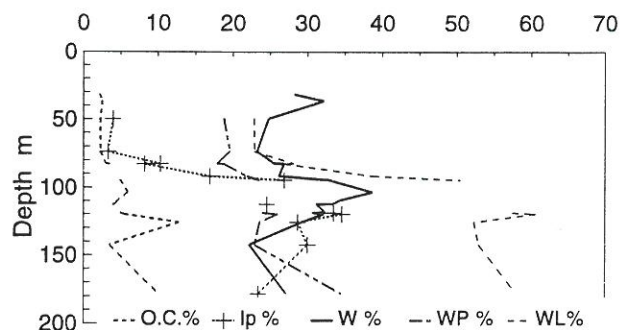


Fig. 5. Skagen 3 boring. Water content, Atterberg limits, plasticity index and organic content.

The oedometer tests have been carried out with 60 mm diameter samples in The Danish Consolidation Apparatus, which has a floating ring (Moust Jacobsen, 1967). The registration of the deformations during the tests has been automatic and continuous using transducers with an accuracy of 10^{-3} mm. The main results of the oedometer tests are given in fig. 6.

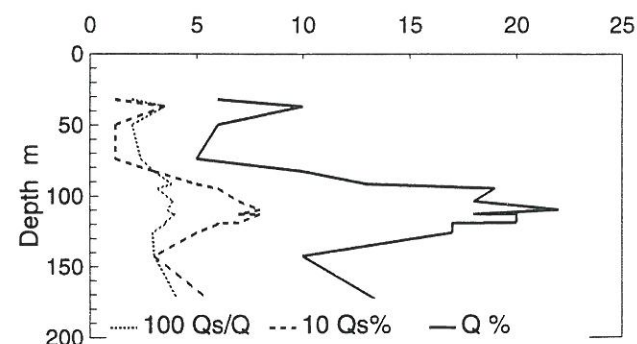


Fig. 6. Skagen 3 boring. Results of oedometer tests.

$Q = \frac{C_c}{(1+e_0)}$, C_c is the coefficient of compressibility $Q_s = d\epsilon/d\log t$, the creep rate for a soil in a normally consolidated state.

The values of Q_s/Q correspond to the values found by Mesri (Mesri, 1987).

For the Holocene clay the coefficient of consolidation, c_k , has been determined to $4 - 8 \times 10^{-8} m^2/sec$.

4. DETERMINATION OF PRECONSOLIDATION PRESSURE FROM OEDOMETER TESTS

On the basis of the oedometer tests the preconsolidation pressure of the soil has been determined using methods as suggested by Casagrande, Akai, and Christensen and Janbu.

4.1 Casagrande's method

For many years the method described by Casagrande (Casagrande, 1936) has been commonly used for the determination of the preconsolidation pressure from results of oedometer tests.




Fig. 7. Casagrande's method.

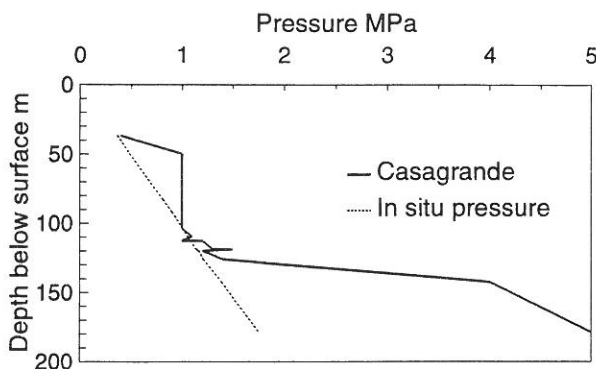


Fig. 8. Skagen 3 boring. Determination of σ'_{pc} by Casagrande's method.

4.2 Akai's method

Akai (Akai, 1960) has used the variation in the creep rate to determine the preconsolidation pressure.

A time settlement curve from a loading can be divided into a consolidation phase and a creep phase. The creep is assumed to be logarithmic by time having a creep rate of ϵ_s .

Akai discovered, that the rate of creep increased proportionally with the effective stress, σ' , for $\sigma' < \sigma'_{pc}$ and with $\log \sigma'$ when $\sigma' > \sigma'_{pc}$.

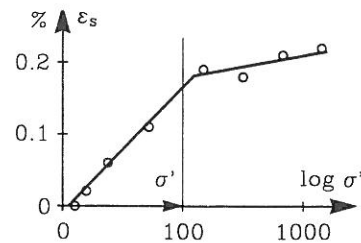


Fig. 9. Akai's method.

In the actual tests ϵ_s has proved to be nearly constant, Q_s , for $\sigma' > \sigma'_{pc}$.

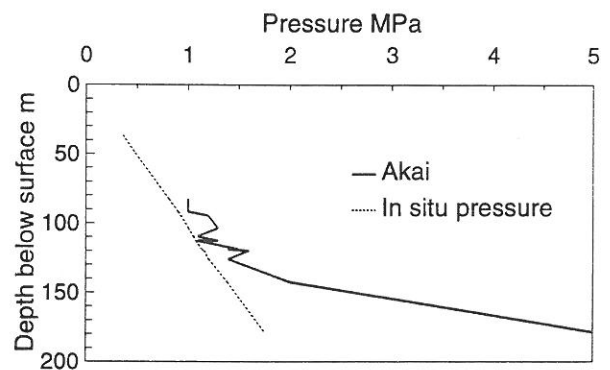


Fig. 10. Skagen 3 boring. Determination of σ'_{pc} by Akai's method.

4.3 Christensen and Janbu's methods

Christensen and Janbu (Christensen and Janbu, 1992), have suggested two methods to determine the preconsolidation pressure.

1) It is possible to determine the preconsolidation pressure from the variation in the Modulus $K = d\sigma'/d\epsilon$. For a preconsolidated soil the modulus is nearly constant and for a normally consolidated soil the variation in the modulus is linear to the stress. It is therefore possible to determine σ'_{pc} at the break in the curve for modulus against stress.

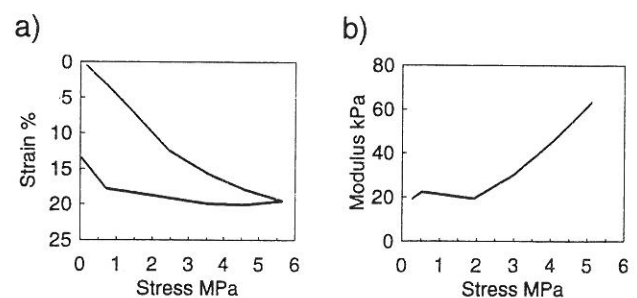


Fig. 11. Skagen 3 boring. Holocene clay. Curves for a) stress - strain b) modulus - stress.

2) The time resistance $R = dt/d\varepsilon$ from a time-settlement curve plotted against time will after some time show a linear curve. The inclination of this line $r = dR/dt$ against stress for each load step will show a break in the curve at σ'_{pc} .

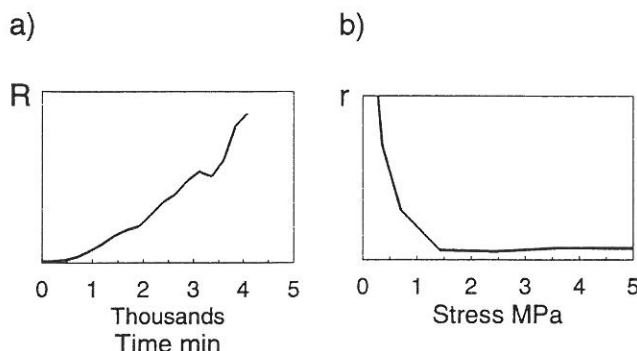


Fig. 12. Skagen 3 boring. Holocene clay. Curves for a) R against time b) r against stress.

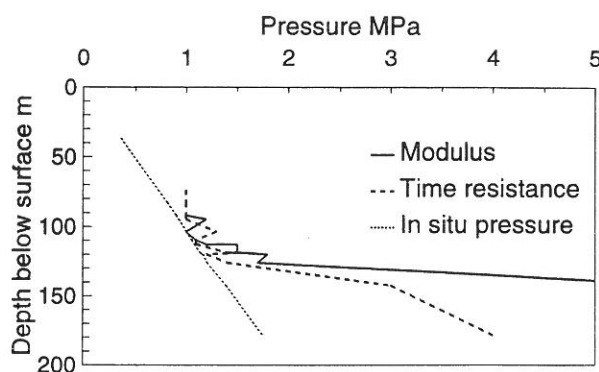


Fig. 13. Skagen 3 boring. Determination of σ'_{pc} by Christensen and Janbu's methods.

4.4 Results of the determination of σ'_{pc}

The results of the determinations of the pre-consolidation pressures as described above indicate the overconsolidation ratio for the Late Glacial and Holocene clays to be $OCR \geq 1$.

In a stepwise oedometer test carried out on samples with in situ pressures as high as in the actual case, it is difficult to determine the correct value of σ'_{pc} because of the size of the load increment in each step. The scattering in the values determined may therefore represent the uncertainties in the determinations rather than variations in the preconsolidation pressures.

The boring has shown clay from 80 m to 134 m, which means a maximum drainage path of 27 m. On the basis of the determined coefficient of

consolidation, c_k , the corresponding time of consolidation is 500 - 1000 years.

In the Late Glacial sediments sand and silt stripes have been observed, which may reduce the drainage path to 17 m and the time of consolidation to 200 - 500 years.

The results of the oedometer tests have indicated that the consolidation process in the Holocene and Late Glacial sediments, caused by the sedimentation of the "Odde"sand, is completed. Based on this it is concluded, that the drainage path must be smaller than half the total thickness of the clay sediments and that the sedimentation of the "Odde"sand must have been nearly finished some hundred years ago.

For the sample extracted just below the upper till layer and for the sample from Eemian the preconsolidation pressures have been determined to more than 2000 kPa and more than 4000 kPa, respectively, corresponding to $OCR \geq 1.4$ and $OCR \geq 2.3$.

5. AGE OF THE SEDIMENTS IN SKAGEN 3

Samples of foraminifera and shells from the marine sediments have been radiocarbon dated by the Accelerator Mass Spectrometry (AMS), (Nielsen et. al., 1994). Results from these datings have shown the age of the Holocene clay and silt sediments to be about 12.000 years in 114 m, about 6.000 years in 80 m and about 1000 years in 30 m below the surface.

The rate of sedimentation has been rather uniform, until the start of the sedimentation of the "Odde"sand.

Fig. 14. shows the max. and min. values of the datings from the "Odde"sand. In the upper 12 m of the sand there are no datings because of lack of shells and foraminifera.

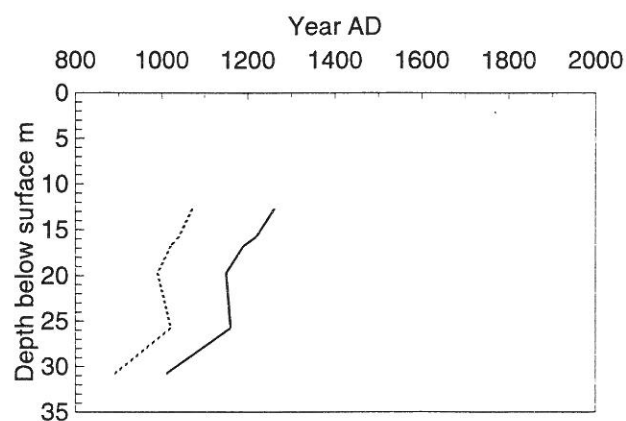


Fig. 14. Skagen 3 boring. Results of AMS ^{14}C -datings from the "Odde"sand (Nielsen et.al., 1994).

6. CREEP

6.1 Moust Jacobsen's model

Moust Jacobsen (Moust Jacobsen, 1992) has set up a model to separate creep and consolidation deformations during the consolidation process.

Moust Jacobsen assumed the consolidation and creep to be simultaneous, and has described the creep as

$$\varepsilon_{cr} = Q_s \log\left(1 + \frac{t_r}{t_b}\right) \quad (1)$$

Q_s = rate of creep for $\sigma' \geq \sigma'_{pc}$

t_r is the real time passed

t_b is a reference time

If the sample is under constant stress from a time t_A to a time $t_A + t$, the additional creep is

$$\Delta\varepsilon_{cr} = Q_s \log\left(1 + \frac{t}{t_A + t_b}\right) \quad (2)$$

and

$$\Delta\varepsilon_{cr} \sim Q_s \log\left(1 + \frac{t}{t_A}\right) \text{ if } t_A \gg t_b$$

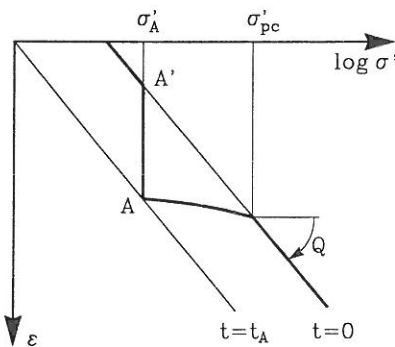


Fig. 15. Behavior of slightly preconsolidated clay (Bjerrum, 1967).

t_A is the creep age, an age which will be reduced by any new loading (Bjerrum, 1967).

For a normally consolidated soil the creep age has often been assumed to be the geological age.

6.2 Creep deformations

In a curve described by (1), t_b is seen to be the additional time which turns the curve into a straight line in a logarithmic scale. t_b might therefore represent the creep time during the consolidation process, and the minimum value for t_A if the consolidation process is completed.

Assuming that the high sedimentation rate of the "Odde"sand from AD 1000 to AD 1200 has reduced the creep age to zero, corresponding to a creep age today of about 800 years the present creep rate is less than:

$$\Delta\varepsilon_{cr} = Q_s \log\left(1 + \frac{1}{800}\right) = Q_s \times 5,4 \times 10^{-4} \%$$

which gives a creep rate of about 0.2 mm/year for the total Holocene layer.

If the creep age is reduced to only 300 years, the creep rate is less than 0.5 mm/year.

Many uncertainties about creep still exist, and especially about the correspondence between the values determined in the laboratory and the real values.

Moust Jacobsen's model makes it possible to separate creep and consolidation by subtraction of the creep curve from the time settlement curve in the laboratory tests. Consequently the determination of the primary curve is improved and a value for the creep age for every load step is obtained. Based on this, an estimation of the state of consolidation is possible.

The actual oedometer tests have been carried out with the additional purpose to study the creep deformations and further investigations of the actual oedometer tests are in progress.

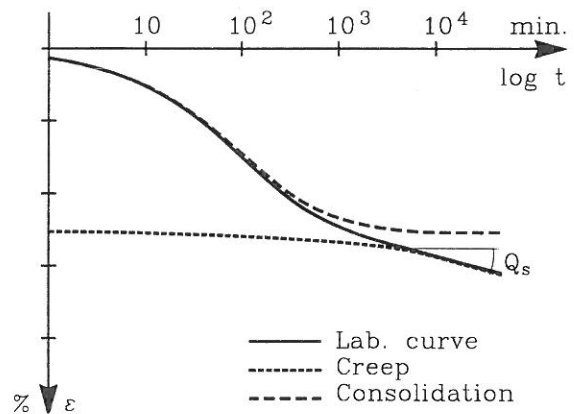


Fig. 16. Separation of creep and consolidation for a soil in a normally consolidated state.

7. CONCLUSION

The results of the geotechnical investigations in the Skagen 3 boring have indicated that the consolidation process in the Holocene silt and clay sediments caused by the sedimentation of the "Odde"sand is completed.

Based on an $OCR \geq 1$ and the values of the coefficient of consolidation, c_k , determined in the laboratory for the samples of clay, it is further concluded, that the actual drainage path in the clay sediments is smaller than half the total thickness of the clay deposits and that the sedimentation of the "Odde" sand must have been nearly finished some hundred years ago.

The AMS ^{14}C -datings have shown a very rapid sedimentation of the lower 18 m of the "Odde" sand. Datings of the upper 12 m sand are necessary to improve the modelling of the consolidation process.

The size of the creep rate is very dependent on the creep age and many uncertainties still exist about the correspondence between the values determined in the laboratory and the real values.

Moust Jacobsen (Moust Jacobsen, 1992) has set up a model to separate creep and consolidation in the laboratory tests. Based on this model further investigations of the actual oedometer tests are in progress in an attempt to improve the understanding of creep.

REFERENCES

- Akai, K. 1960. *Die structurellen Eigenschaften von Schluff*. Mitteilungen Heft 22. Die Technische Hochschule, Aachen.
- Bjerrum, L. 1967. Engineering Geology of the Norwegian Normally Consolidated Marine Clays as Related to Settlements of Buildings. *Geotechnique* 17, p. 81 - 118.
- Casagrande, A. 1936. The determination of the preconsolidation pressure and its significance. *IICSMFE Cambridge*, Vol. 3, p. 60 - 64.
- Christensen, S., Janbu, N. 1992. Ødometerforsøg - et primærkrav i praktisk geoteknik. (Oedometer tests - a primary requirement in practical soil mechanics). *Proc. NGM-92*, Aalborg, Danish Geotechnical Society, Bulletin 9, Vol. 2, p. 449 - 454.
- Hauerbach, P. 1992. Skagen Odde - The Skaw Spit - an area of land created between two seas. *Folia Geographica Danica*. Tom XX. Copenhagen: Reitzel.
- Knudsen, K. L. 1985. Correlation of Saalian, Eemian and Weichselian foraminiferal zones in North Jutland. *Bulletin of the Geological Society of Denmark*, 33, p. 325 - 329.
- Knudsen, K. L. 1994. The marine Quarternary in Denmark: a review of new evidence from glacial-interglacial studies. *Bulletin of the Geological Society of Denmark*, 41, in press.
- Lykke-Andersen, H. 1987. Thickness of Quaternary deposits and their relation to the pre-Quaternary in the Fennoscandian border zone in Kattegat and Vendsyssel. *Boreas*, 16, p. 369 - 371.
- Mesri, G., Asce, M. & A. Castro 1987. C_u/C_c Concept and K_o during secondary compression. *Journal of Geotechnical Engineering*, Vol. 113, No. 3, p. 230 - 247.
- Moust Jacobsen, H. 1967. *Morænelers geotekniske Egenskaber*. (The geotechnical properties of clay till). Ph. D.-thesis 1967. Reprinted 1994. Aalborg University.
- Moust Jacobsen, H. 1992. Bestemmelse af forbelastningstryk i laboratoriet. (Determination of preconsolidation pressure in the laboratory). *Proc. NGM-92*, Aalborg, Danish Geotechnical Society, Bulletin 9, Vol. 2, p. 455 - 460.
- Moust Jacobsen, H. 1992. Karakteristiske belastningstilstande for moræneler. (Characteristic stress conditions for clay till). *Proc. NGM-92*, Aalborg, Danish Geotechnical Society, Bulletin 9, Vol. 2, p. 461 - 466.
- Nielsen, S. H., Conradsen, K., Heinemeier, J., Knudsen, K. L., Nielsen, H. L., Rud, N. & A. E. Sveinbjörnsdóttir 1994. Radiocarbon dating of shells and foraminifera from the Skagen core, Denmark: Evidence of reworking. 15th International Radiocarbon Conference, Glasgow.
- Skempton, A. W. 1957. "Discussion: The planning and design of the new Hong Kong airport." *Proc. Inst. Civil Engrs.*, London, 7, p. 305 - 307.

AGEP: Soil Mechanics papers

- 1 Thorsen, G. (1995). Preconsolidation Pressure and Creep Settlements: Estimations based on results of oedometer tests. *Proc. Int. Symp. on Compression and Consolidation of Clayey Soils. IS-Hiroshima'95*, Vol. 1, pp 287-292. Also in *AAU Geotechnical Engineering Papers*, ISSN 1398-6465 R9503.
- 2 Trankjær, H. (1995). Deformations of a slightly preconsolidated clay till. *Proc. Int. Symp. on Compression and Consolidation of Clayey Soils. IS-Hiroshima'95*, Vol 1, pp 373-378. Also in *AAU Geotechnical Engineering Papers*, ISSN 1398-6465 R9504.
- 3 Ibsen, L.B. (1995). The Static and Dynamic Strength of Sand. *Proc. 11th Eur. Conf. Soil Mech. & Fndn. Engng. Copenhagen*. Danish Geotechnical Society, Bulletin 11, Vol 6, pp 69-75. Also in *AAU Geotechnical Engineering Papers*, ISSN 1398-6465 R9505.
- 4 Thorsen, G. (1995). The Skaw Spit - a question of settlements. *Proc. 11th Eur. Conf. Soil Mech. & Fndn. Engng. Copenhagen*. Danish Geotechnical Society, Bulletin 11, Vol 3, pp 263-268. Also in *AAU Geotechnical Engineering Papers*, ISSN 1398-6465 R9507.
- 5 Thorsen, G. (1995). Time dependence in flow through fissured samples of White Chalk. *Proc. 11th Eur. Conf. Soil Mech. & Fndn. Engng. Copenhagen*. Danish Geotechnical Society, Bulletin 11, Vol 1, pp 291-296. Also in *AAU Geotechnical Engineering Papers*, ISSN 1398-6465 R9508.
- 6 Ibsen, L.B. (1995). Soil Parameters, Final proceedings MCS - Project MAST II, July 1995. Also in *AAU Geotechnical Engineering Papers*, ISSN 1398-6465 R9514.
- 7 Sørensen, C. S., Ibsen, L. B., Jakobsen, F. R., Hansen, A., Jakobsen, K. P., (1995) "Bearing Capacity of Caisson Breakwaters on Rubble Mounds". Proceedings of the Final Project Workshop, Monolithic (Vertical) Coastal Structures, Alderney, UK, Appendix IX, p 26. Also in *AAU Geotechnical Engineering Papers*, ISSN 1398-6465 R9515.
- 8 Ibsen, L.B., Steenfelt, J.S. (1996). Terningapparatet - et middel til bedre jordforståelse (The true-triaxial-apparatus - a means to better understanding of soil behaviour; in Danish). *Proc. Nordic Geotechnical Meeting, NGM-96, Reykjavik*, Vol 1, pp 111-122. Also in *AAU Geotechnical Engineering Papers*, ISSN 1398-6465 R9603.
- 9 Thorsen, G., Thomsen, B., Thorsen, S. (1996). Tilsyneladende forbelastning af Eem jordarter (Apparent preconsolidation of Eemian soils; in Danish). *Proc. Nordic Geotechnical Meeting, NGM-96, Reykjavik*, Vol 1, pp 147-152. Also in *AAU Geotechnical Engineering Papers*, ISSN 1398-6465 R9607.
- 10 Thorsen, G. (1996). Oedometer tests - an aid in determination of the geological load history. *Bull. of the Geological Society of Denmark*, Vol. 43, pp. 41-50. Copenhagen 1996-07-14. Also in *AAU Geotechnical Engineering Papers*, ISSN 1398-6465 R9608.
- 11 Ibsen, L.B., Jakobsen, K.P. (1997). Dynamic Bearing Capacity of Caisson Breakwaters Subjected to Impulsive Wave Loading. MAST III (PROVERBS Workshop, Las Palmas, Feb. 18-24-1997. Also in *AAU Geotechnical Engineering Papers*, ISSN 1398-6465 R9701.

AGEP: Soil Mechanics papers

- 12 Lade, P.V., Ibsen, L.B. (1997). A study of the phase transformation and the characteristic lines of sand behaviour. *Proc. Int. Symp. on Deformation and Progressive Failure in Geomechanics*, Nagoya, Oct. 1997, pp. 353-359. Also in *AAU Geotechnical Engineering Papers*, ISSN 1398-6465 R9702.
- 13 Bødker, L., Steenfelt, J.S. (1997). Vurdering af lodrette flytningsamplituder for maskinfundament, Color Print, Vadum (Evaluation of displacement amplitudes for printing machine foundation; in Danish). *AAU Geotechnical Engineering Papers*, ISSN 1398-6465 R9706.
- 14 Ibsen, L.B., Steenfelt, J.S. (1997). Vurdering af lodrette flytningsamplituder for maskinfundament Løkkensvejens kraftvarmeværk (Evaluation of displacement amplitudes for gas turbine machine foundation; in Danish). *AAU Geotechnical Engineering Papers*, ISSN 1398-6465 R9707.
- 15 Steenfelt, J.S. (1997). National R&D Report : Denmark. *Seminar on Soil Mechanics and Foundation Engineering R&D*, Delft 13-14 February 1997. pp 4. Also in *AAU Geotechnical Engineering Papers*, ISSN 1398-6465 R9708.
- 16 Lemonnier, P. and Soubra, A. H. (1997). Validation of the recent development of the displacement method - geogrid reinforced wall. *Colloquy EC97 on the comparison between experimental and numerical results*, Strasbourg, France. Vol.1, pp. 95-102. Also in *AAU Geotechnical Engineering Papers*, ISSN 1398-6465 R9712.
- 17 Lemonnier, P. & Soubra, A. H. (1997). Recent development of the displacement method for the design of geosynthetically reinforced slopes - Comparative case study. *Colloquy on geosynthetics, Rencontres97, CFG*, Reims, France, Vol. 2, pp. 28AF-31AF (10pp). Also in *AAU Geotechnical Engineering Papers*, ISSN 1398-6465 R9713.
- 18 Lemonnier, P., Soubra, A. H. & Kastner, R. (1997). Variational displacement method for geosynthetically reinforced slope stability analysis : I. Local stability. *Geotextiles and Geomembranes* 16 (1998) pp 1-25. Also in *AAU Geotechnical Engineering Papers*, ISSN 1398-6465 R9714.
- 19 Lemonnier, P., Soubra, A. H. & Kastner, R. (1997). Variational displacement method for geosynthetically reinforced slope stability analysis : II. Global stability. *Geotextiles and Geomembranes* 16 (1998) pp 1-25. Also in *AAU Geotechnical Engineering Papers*, ISSN 1398-6465 R9715.
- 20 Ibsen, L.B. (1998). Analysis of Horizontal Bearing Capacity of Caisson Breakwater. 2nd PROVERS Workshop, Napels, Italy, Feb. 24-27-98. Also in *AAU Geotechnical Engineering Papers*, ISSN 1398-6465 R9802.
- 21 Ibsen, L.B. (1998). Advanced Numerical Analysis of Caisson Breakwater. 2nd PROVERS Workshop, Napels, Italy, Feb. 24-27-98. Also in *AAU Geotechnical Engineering Papers*, ISSN 1398-6465 R9803.
- 22 Ibsen, L.B., Lade P.V. (1998). The Role of the Characteristic Line in Static Soil Behavior. *Proc. 4th International Workshop on Localization and Bifurcation Theory for Soil and Rocks*. Gifu, Japan. Balkema 1998. Also in *AAU Geotechnical Engineering Papers*, ISSN 1398-6465 R9804.